

UNIBAR QUALITIES

GREY / FLAKE IRON		SG / NODULAR IRON		SPECIAL QUALITIES	
Material	DIN Specification	Material	DIN Specification	Material	DIN Specification
Unibar 200	EN-GJL-200C	Unibar 400-15	EN-GJS-400-15C	Unibar NR-F1	EN-GJLA-XNiCuCr15-6-2
Unibar 250	EN-GJL-250C	Unibar 400-18	EN-GJS-400-18C	Unibar NR-S2	EN-GJSA-XNiCr20-2
Unibar 250+	Unibar Specification ¹	Unibar 400-18LT	EN-GJS-400-18C-LT	Unibar ADI	
Unibar 300	EN-GJL-300C	Unibar 400-18RT	EN-GJS-400-18C-RT		
Unibar 350	EN-GJL-350C	Unibar 500-7	EN-GJS-500-7C		
Unibar GF	Unibar Specification	Unibar 500+	Unibar Specification ²		
Unibar GFP	Unibar Specification	Unibar 500-14	EN-GJS-500-14C		
Unibar GFMV	Unibar Specification	Unibar 600-3	EN-GJS-600-3C		
		Unibar 700-2	EN-GJS-700-2C		

¹ Will conform to EN-GJL-250C


² Will conform to EN-GJS-500-7C

SERVICE

Cutting ■ Milling ■ Turning ■ Boring ■ Peeling ■ Finish Machining

“SUPER SIZE” DIMENSIONS AND SPECIAL PROFILES

In addition to our standard sizes we also have “Super Size” dimensions in stock. Large profiles, flange sleeves, L-profiles and other special profiles are available upon request.

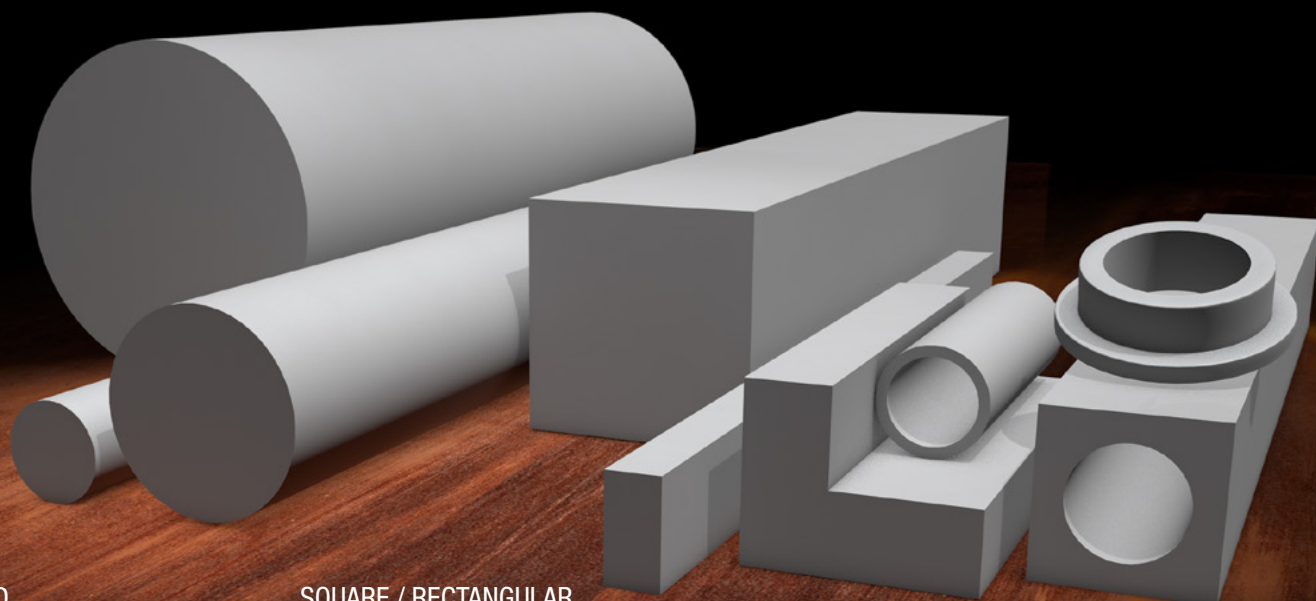

ROUND
∅ up to 1000mm

SQUARE / RECTANGULAR
Ingot blocks up to 1500mm x 1000mm

SPECIAL PROFILES